

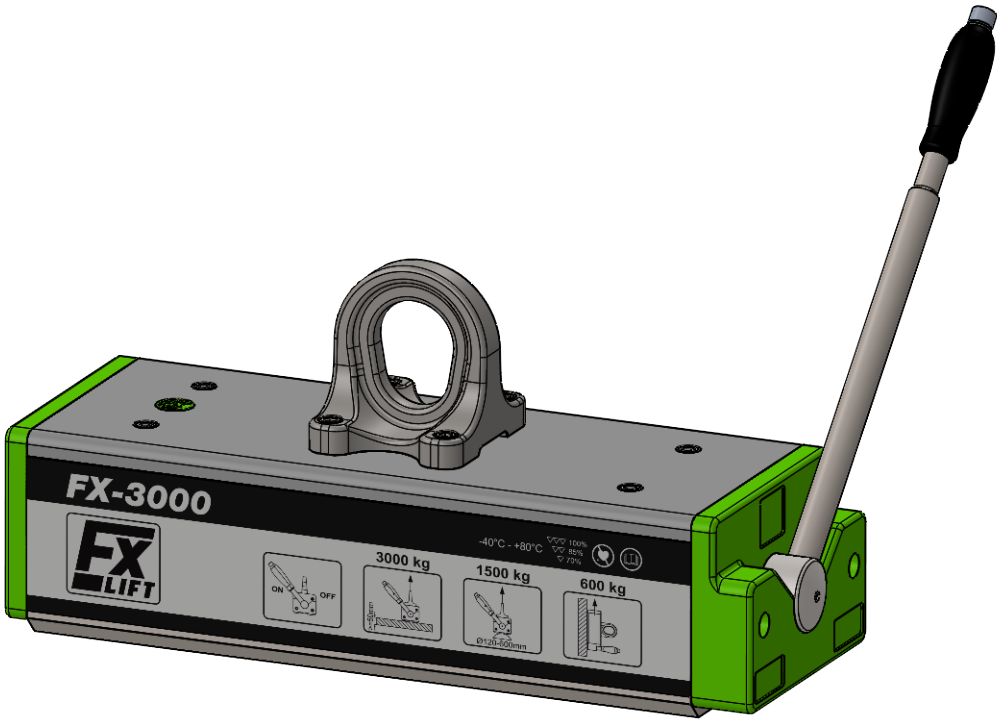


Working load according to EN 13155/WLL	
Load capacity on flat material:	3000kg
Load capacity Ø120-600:	1500kg
Max. load capacity > 50mm material thickness	

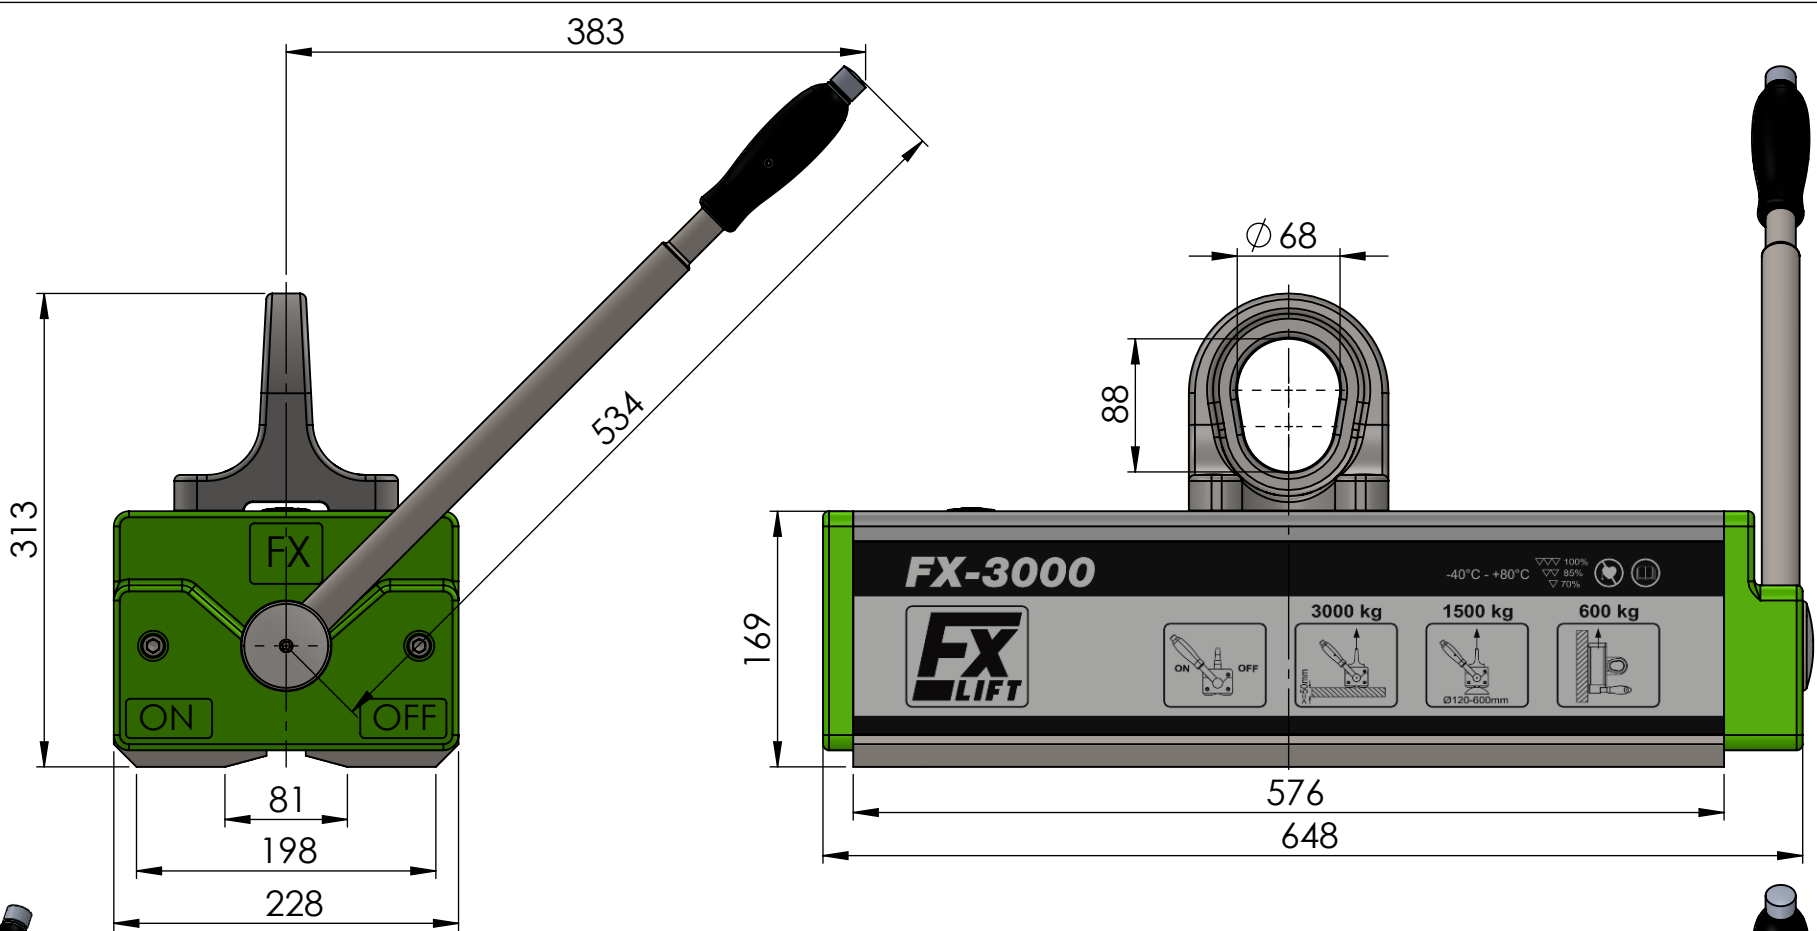

Green-Dot
NFC-Tag with magnet
related information

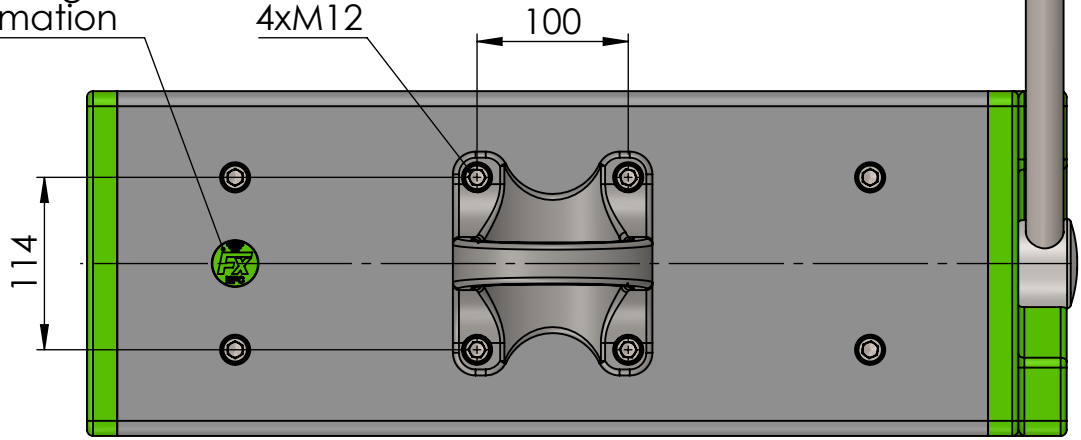

FX-3000	Air gap <0,3mm			Air gap 0,3- 0,6mm			Air gap 0,6- 0,8mm			Schutzvermerk nach DIN ISO 16016 beachten! Nachdruck nur mit unserer Genehmigung! All rights reserved according to DIN ISO 16016! Reprint with our permission only!				3,2 -0,05 -0,2		tolerance	material:		weight: 166.00	
Material Thickness (mm) Max. Load (kg) Max. L (mm) Max. B(mm) >=15 >=25 >=40 >=50 Ø120-600	Max. Load (kg) Max. L (mm) Max. B(mm) 600 1400 2000 2400 1200	Max. L (mm) Max. B(mm) 2500 2500 3000 3000 3000 5000	Max. B(mm) 2500 2500 2500 2500 2500 -	Max. Load (kg) Max. L (mm) Max. B(mm) 500 1200 1600 2000 1000	Max. L (mm) Max. B(mm) 2500 3000 3000 3000 4000	Max. B(mm) 2000 2000 2000 2000 2000 -	ISO 7168 M	drawing no.: 0011953												
							date		name		description: FX-3000									
							drawn	26.07.2022	TW											
							edit	31.01.2024												
							appr.	31.01.2024	TW											
							04 Green Dot		06.11.2023		TW		part no.: 11013000		sheet 1 / 1					
							03 Nut 2 in 1,5		03.04.2023		TW									
02 Nut in Body		17.11.2022		TW																
rev.	change	date		name		FLAIG Magnetsysteme www.flraig-te.de				scale: 1:5		Status: Freigegeben								