

TR-10/15 KA

Self-Aligned Turning Rolls

The self-aligning turning rolls automatically adjust the roller position according to different workpiece diameter. Designed to simplify setup and handle a wide variety of workpieces with ease. The perfect solution for increasing productivity and efficiency.



Features


- Automatically adjusts to different workpiece diameters
- Ensures even weight distribution for optimal stability
- Option : Wheel & brake set and tracks

Specification

Model	Unit	TR-10KA	TR-15KA
Power input		3Ø 220/380VAC 50/60Hz	
Drive motor	hp	1/2 + 1/2	
Load capacity (drive / idler)	kg	5,000 / 5,000	7,500 / 7,500
Turning capacity	kg	10,000	15,000
Speed range	mm/min	60 ~ 1,200	
Dimension (A x B x C)	mm	drive : 1,750 x 600 x 870 idler : 1,500 x 600 x 870	
Diameter range (D)	mm	Ø300 ~ 4,000	
Roller dimension (E x F)	mm	200 x 100	200 x 150
Roller type		PU	

※ Specifications subject to change.

Dimensions

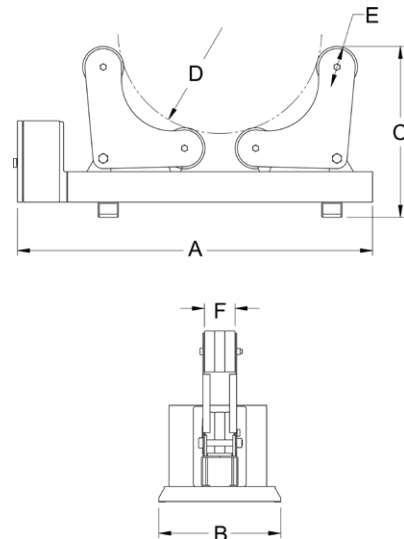

United ProArc Corporation

www.proarc.com.tw

Tel : 886-3-4696600 Fax : 886-3-4694499 E-mail : sales@proarc.com.tw

No.8 Gungye 2nd Road, Pingjen Industrial Park, Pingjen Dist., Taoyuan City 324403, Taiwan

SD-4022AE