


CLOSED WELD HEADS

CWH

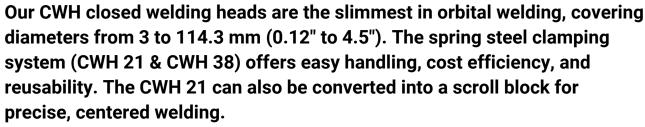

For larger applications, the water-cooled CWH 53, CWH 76, and CWH 115 feature patented spring-loaded clamping jaws for secure, high-quality welds.


HIGHLIGHT

- Water- or gas cooled (CWH-13, CWH-21 and CWH-38 gas cooled only)
- Available in tachogenerator-version (AMI, Orbitalum, Magnatech, ESAB, ...)
- Novel, springing clamp-system (trademark)
- 8 m long hose, longer on demand
- Longlife aluminium collets (CWH-21, CWH-38, CHW-53, CWH -76 and CWH-115)
- Interchangeable cassettes for the CWH-13
- · Accessories: Stabile suitcase with first-class foam material-insert





TECHNICAL DATA

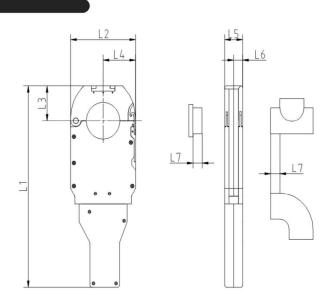

| weld head | range | dimensions | | | | | | | weight |
|-----------|-----------------|------------|---------|---------|---------|---------|---------|---------|----------|
| | | L1 | L2 | L3 | L4 | L5 | L6 | L7 | Weight |
| CWH-13 | 3,17– 12,7 mm | 242 mm | 64 mm | 6,1mm | 32,7 mm | 12,2 mm | 6,3 mm | 6 mm | 5,0 kg |
| | (0.12" – 0.50") | (9.53") | (2.52") | (0.24") | (1.29") | (0.48") | (0.25") | (0.24") | 11.02 lb |
| CWH-21 | 3,17 – 21,3 mm | 339 mm | 70 mm | 36mm | 35 mm | 28 mm | 14 mm | 14 mm | 7,3 kg |
| | (0.12" – 0.84") | (13.35") | (2.76") | (1.42") | (1.38") | (1.10") | (0.55") | (0.55") | 16.09 lb |
| CWH-38 | 3,17 – 38,1 mm | 365 mm | 102 mm | 49 mm | 51 mm | 28 mm | 14 mm | 14 mm | 7,6 kg |
| | (0.12" – 1.50") | (14.37") | (4.02") | (1.93") | (2.01") | (1.10") | (0.55") | (0.55") | 16.76 lb |
| CWH-53 | 6 – 53 mm | 392 mm | 138 mm | 68 mm | 69 mm | 38 mm | 19 mm | 19 mm | 9,5 kg |
| | (0.24" – 2.09") | (15.43") | (5.43") | (2.68") | (2.72") | (1.50") | (0.75") | (0.75") | 20.94 lb |
| CWH-76 | 6 – 76,2 mm | 436 mm | 160 mm | 79 mm | 80 mm | 38 mm | 19 mm | 19 mm | 10,0 kg |
| | (0.24" – 3.00") | (17.17") | (6.30") | (3.11") | (3.15") | (1.50") | (0.75") | (0.75") | 22.05 lb |
| CWH-115 | 8 – 114,3 mm | 470 mm | 200 mm | 97 mm | 100 mm | 38 mm | 19 mm | 19 mm | 15 kg |
| | (0.31" – 4.50") | (18.50") | (7.87") | (3.82") | (3.94") | (1.50") | (0.75") | (0.75") | 33.07 lb |







Closed Weld Head CWH5H/CWH10H



The Orbitalservice CWH5H and CWH10H have been designed to respond to the highest demands in the high purity welding industries. The heavy duty integrated water cooling makes this head unique on the market.

Made for the high purity welders

These orbital weld heads are specially designed for small tube diameters from 3.0 mm to 25.4 mm (0.118" - 1") and wall thicknesses up to 2.0 mm (0.079") like those used in production systems from the semi-conductor industry. These heads are with a removable clamping bloc which can be very easily positioned around the tubes to be welded in inline assembly at the welding site or prefab production of panels in the workshop.



HD Water cooling



The integrated heavy duty water cooling protects the closed head from overheating. Furthermore, it reduces the cooling time and increases the production.











Closed Weld Head


CWH5H




DIMENSIONS





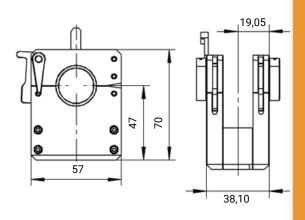

Clamping Cassette with electrode distance gage included



Possibility to weld different tube configurations (Tube/Tube – Tube/elbow union – Fitting/Fitting - ...)

PRODUCT DETAILS

Tube OD min-max

3 mm - 15,88 mm 1/8" - 5/8"

Electrode diameter

1,6 mm 0.006" - 1/16"

Weight

1,5 kg /3.31 lb w/o hose package 5,8 kg / 12.79 lb with hose package

Hose package length

9,5 m 31.17 ft



+49 (0)6092 822 940 info@orbitalservice.de





Closed Weld Head


CWH10H




DIMENSIONS





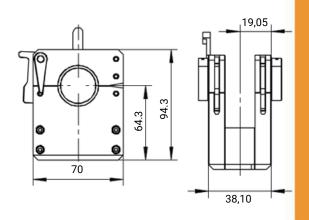

Clamping Cassette with electrode distance gage included



Possibility to weld different tube configurations (Tube/Tube – Tube/elbow union – Fitting/Fitting - ...)

PRODUCT DETAILS

Tube OD min-max

6,35 mm - 25,4mm 1/4" - 1"

Electrode diameter

1,6 mm 0.006" - 1/16"

Weight

1,8 kg / 3.97 lb w/o hose package 6,1 kg / 13.45 lb with hose package

Hose package length

9,5 m 31.17 ft



+49 (0)6092 822 940 info@orbitalservice.de