

Adjust-O-Stands

KP-AOS-HP / LP



KP-AOS-HP

Load Capacity	1814kg / 4000lbs
Pipe Diameter Range	50 - 1220mm / 2 - 48"
Operational Height	965 - 1600mm / 38 - 63"
Wheel Width	75mm / 3"
Dimensions	W795 x L865mm / W31 - L34"
Shipping Weight	75kg / 165lbs

KP-AOS-LP

Load Capacity	3175kg / 7000lbs
Pipe Diameter Range	50 - 1220mm / 2 - 48"
Operational Height	610 - 910mm / 24 - 36"
Wheel Width	75mm / 3"
Dimensions	W795 x L765mm / W31 - L30"
Shipping Weight	62.5kg / 138lbs

The AOS-HP pipe stand is specifically engineered for heavy-duty applications, providing exceptional support for large pipe diameters of up to 48 inches. With a remarkable weight capacity of 4000lbs, this stand ensures stability and reliability even when dealing with substantial loads. What sets the AOS-HP apart is its maximum operational height of up to 1600mm, allowing for efficient handling of high pipe work. Whether you're working on elevated installations, industrial projects, or construction sites, the AOS-HP offers the ideal solution for secure and precise pipe positioning.

The AOS-LP pipe stand is the go-to solution for pipe welders seeking exceptional performance and reliability. Designed specifically for handling large pipe diameters of up to 48 inches, this stand offers an impressive weight capacity of up to 7000lbs. Its sturdy construction ensures stability during welding operations, providing a secure platform for precise pipe positioning. Whether you're working in a fabrication shop or on-site, the AOS-LP pipe stand is the trusted choice for pipe welders, delivering outstanding results and streamlining your workflow.

Check the back for information on our innovative AOS Conveyor Add-On for feeding pipes down a line.



FEATURES

- Heavy duty solid acme rod for durable, yet precise adjustment under load.
- 6x3" Heavy duty polyurethane over steel wheels with sealed bearings, ideal for smooth, bump free pipe rotation
- Contamination free wheels are ideal for carbon or exotic pipe fabrication

FEET/WHEEL OPTIONS



Self-levelling
stationery feet

Grooved wheels for
floor rail (Wheel centre
point width: 26")

Swivel caster
wheel kit with brakes



UK Head Office
Key Plant Automation Ltd
Ball Haye Green, Leek
Staffordshire, ST13 6BW, United Kingdom
Tel: +44 01538 388 388 Email: sales@keyplant.com

USA Office
Key Plant Automation LLC
6039 Thomas Road, Building G
Houston, TX 77041, United States
Tel: +1 832 770 9173 Email: usa@keyplant.com

Also available from
our global partner network



Your #1 supplier for pipe welding and fabrication equipment




www.keyplant.com


High Profile and Low Profile

Adjust-O-Stands GAs

KP-AOS-HP

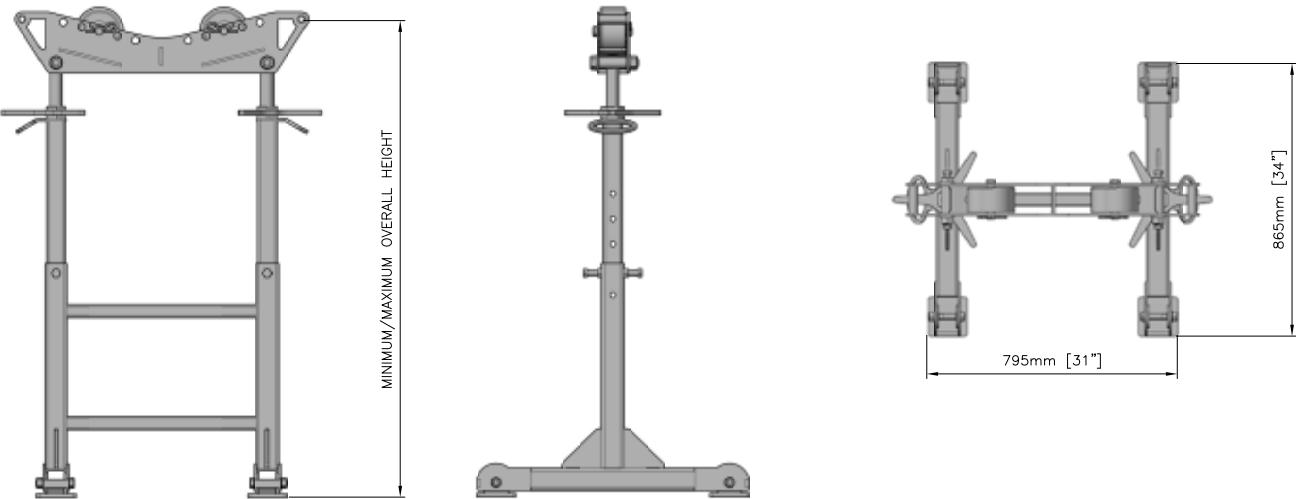

KP-AOS-LP

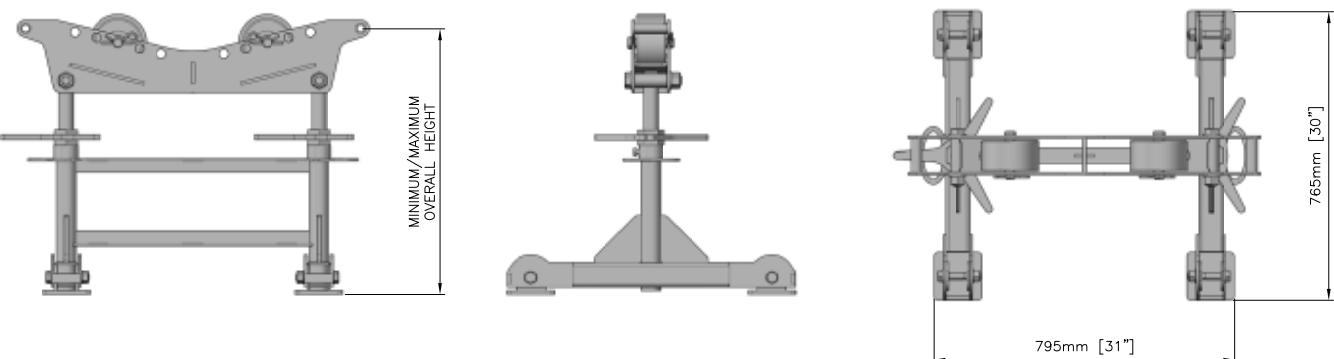

AOS Conveyor Add-On

Introducing the latest addition to our Adjust-O-Stand range: the Key Plant AOS conveyor add-on. This modified extension is designed to efficiently feed long pipes down a line with ease, making it an ideal solution for on-site work.

	KP-AOS-CVHP	KP-AOS-CVLP
Load Capacity	1814kg / 4000lbs	3175kg / 7000lbs
Pipe Diameter Range	76.2 - 1220mm / 3 - 48"	76.2 - 1220mm / 3 - 48"
Operational Height	965 - 1600mm / 38 - 63"	600 - 910mm / 24 - 36"
Wheel Width	254mm / 10"	254mm / 10"
Shipping Weight	75kg / 165lbs	62.5kg / 138lbs



UK Head Office
Key Plant Automation Ltd
Ball Haye Green, Leek
Staffordshire, ST13 6BW, United Kingdom
Tel: +44 01538 388 388 Email: sales@keyplant.com

USA Office
Key Plant Automation LLC
6039 Thomas Road, Building G
Houston, TX 77041, United States
Tel: +1 832 770 9173 Email: usa@keyplant.com

Also available from
our global partner network



Your #1 supplier for pipe welding and fabrication equipment



www.keyplant.com