

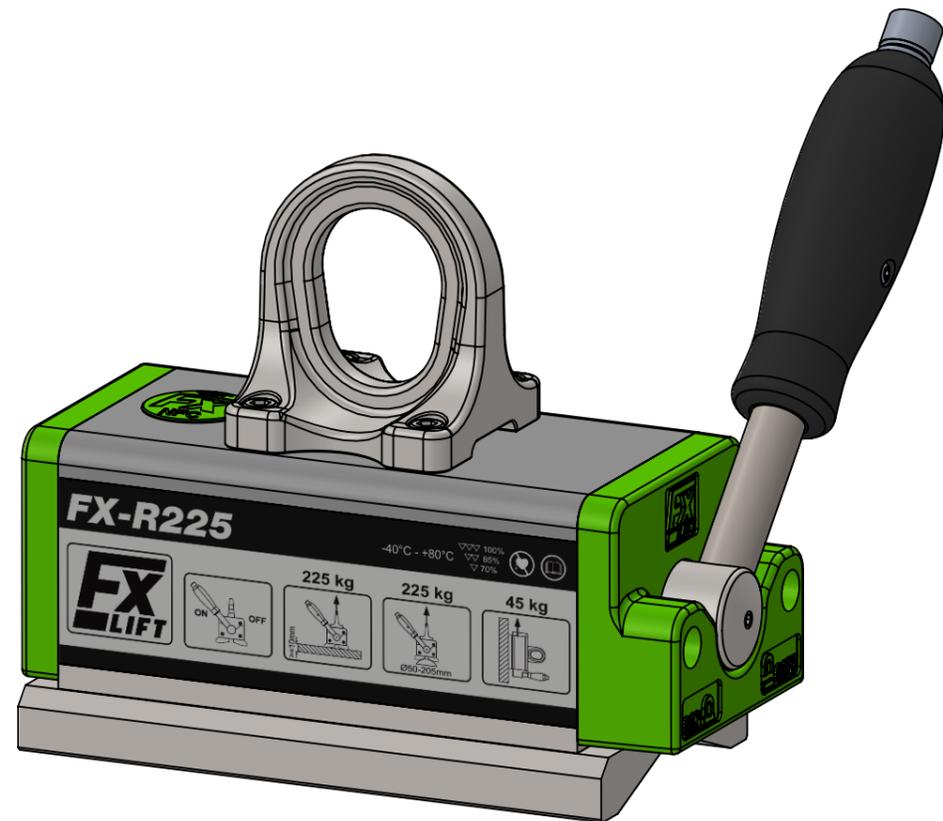


Working load according to EN 13155/WLL	
Load capacity on flat material:	225kg
Load capacity Ø50-205mm:	225kg
Max. load capacity > 10mm material thickness	

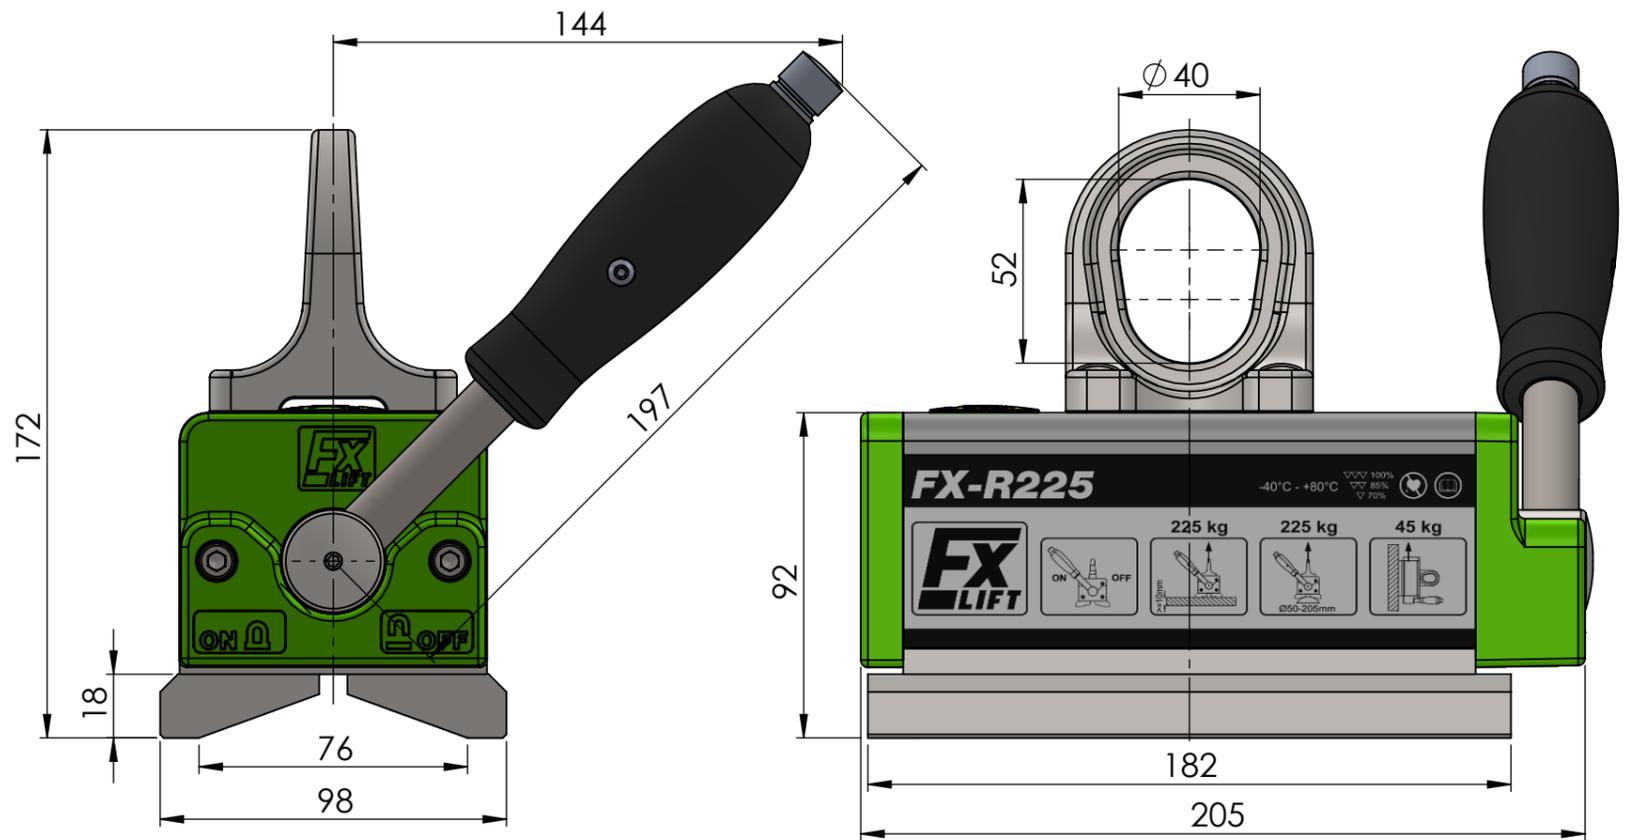

**Green-Dot**  
NFC-Tag with magnet  
related information

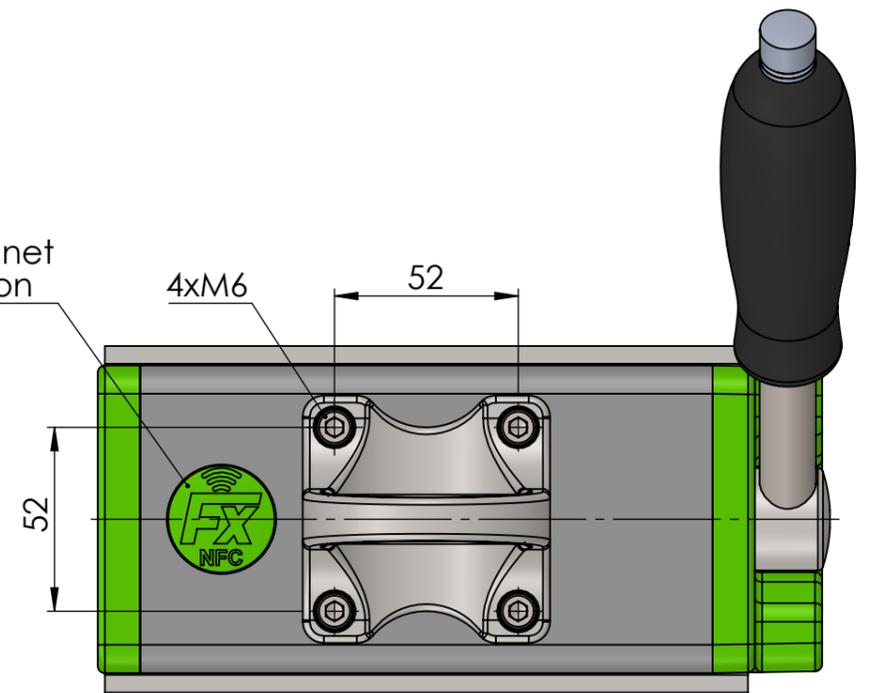

FX-R225	Air gap <0,2mm			Air gap 0,2-0,3mm			Air gap 0,3-0,6mm		
	Max. Load (kg)	Max. L (mm)	Max. B(mm)	Max. Load (kg)	Max. L (mm)	Max. B(mm)	Max. Load (kg)	Max. L (mm)	Max. B(mm)
>=4	80	1600	1000	60	1500	1000	40	1250	1000
>=8	180	2000	1250	150	2000	1250	120	1500	1250
>=10	225	2250	1250	200	2000	1250	150	1500	1250
Ø50-205	225	3000	-	200	2500	-	150	2000	-

Schutzvermerk nach DIN ISO 16016 beachten! Nachdruck nur mit unserer Genehmigung!				3,2 / -0,05 / -0,2		tolerance	material:	weight: 9.50	
All rights reserved according to DIN ISO 16016! Reprint with our permission only!				date		ISO 7168 M	drawing no.: 0013851		
				drawn 28.07.2022		name	description: <b>FX-R225</b>		
				edit 31.01.2024					
				appr. 31.01.2024		TW			
							part no.: 11010221		sheet 1 / 1
							scale: 1:2		A3
							Status: Freigegeben		

